

⚠ WARNING - SHOCK HAZARD

To avoid the risk of electric shock locate and remove fuse or lock circuit breaker in the OFF position before proceeding. Wiring with power ON could result in serious injury or death. Use only on 120 VAC, 60 Hz circuits

1. Turn power OFF at fuse box or circuit breaker

2. Attach Medium Base Adaptor wires to led driver AC input wires using UL approved wire nuts




3. Screw the Medium Base Adaptor into the can socket



4. Affix the Driver to the side of the can with 2-sided tape






5. Attached DC driver connector to Lamp connector



6. Install lamp to the can with retention springs



7. Snap bezel onto lamp

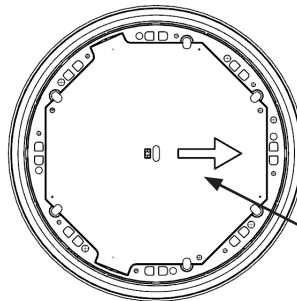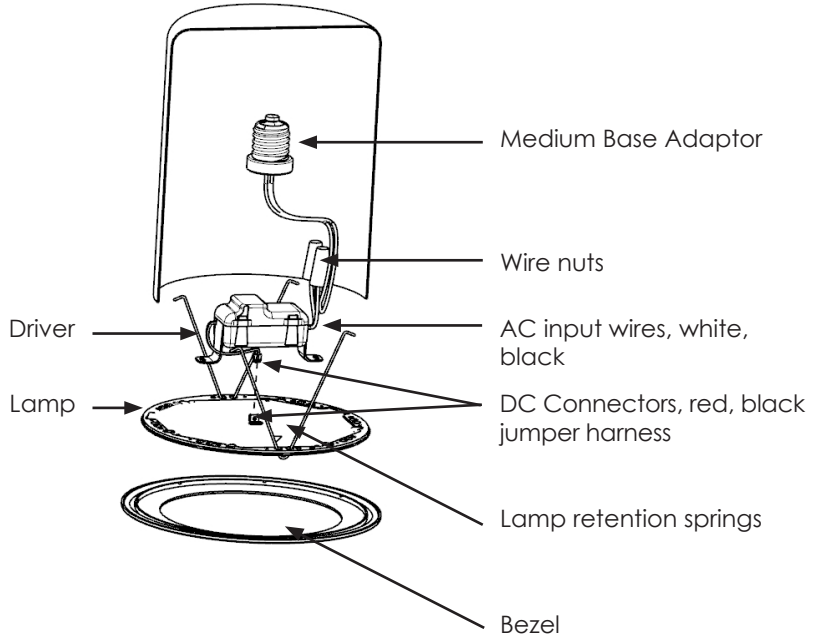

Aim asymmetrical light pattern in direction of arrow